

Cat/cat5e/cat6

26AWG, 24AWG, 23AWG

Related Temperature 65°C-100°C

Bare Copper Conductor for Solid/Stranded

Color-Coded PE Insulation

Lead Free PVC/LSOH Jack

RIP Cord (Optional)


Flammability Grade: CM CMX CMR

UL/CUL, CE Approved


EIA/TIA T568A/B IEC/ISO11801

Reference Standard: UL444


Cat/cat5e Cable

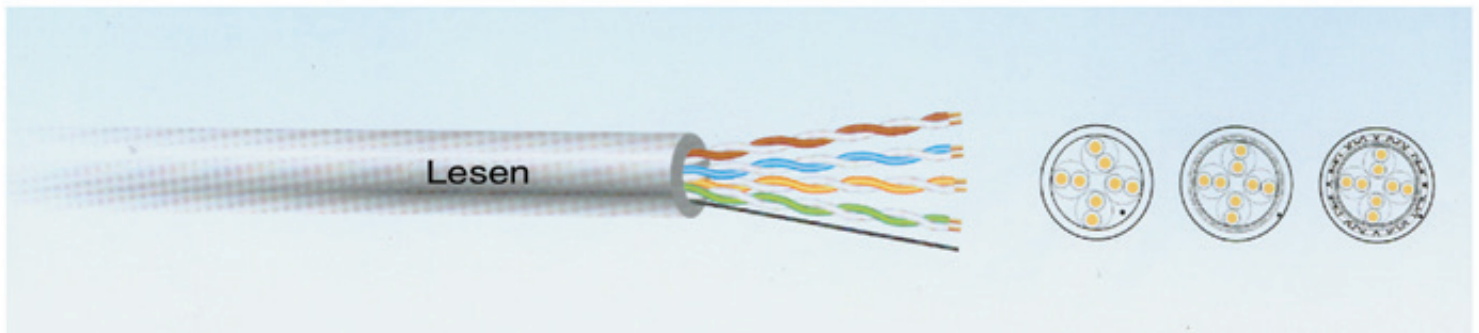

Cat6 Cable

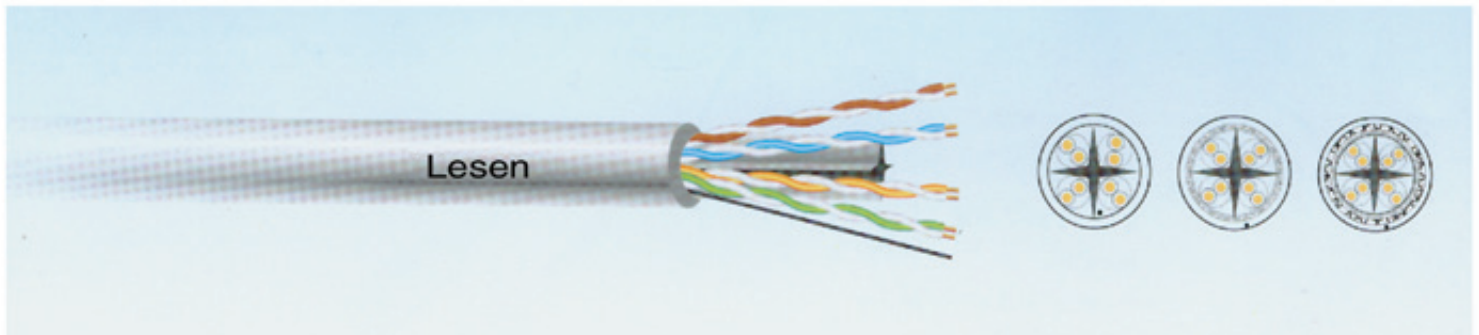

Cat6 SSTP Cable

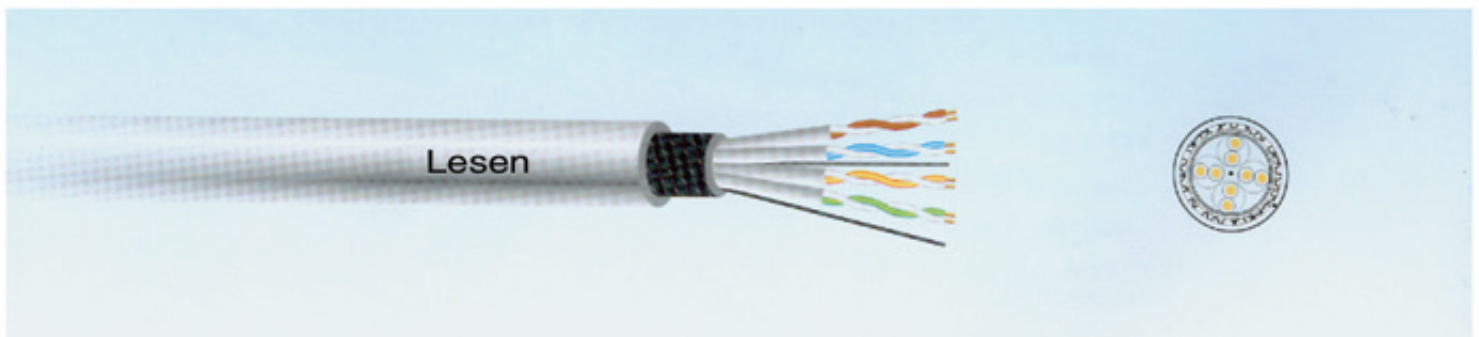

Cat5 Cable

ITEM NO	CONSTRUCTION	CONDUCTOR		NO. OF PAIRS	SHIELDING	O.D./mm
LS-1001	UTP	24AWG	Solid	4		5.1
LS-1002	FTP	24AWG	Solid	4	AL Foil	6.3
LS-1003	SFTP	24AWG	Solid	4	AL Foil+Cu braiding	6.6
LS-1004	UTP	26AWG / 24AWG	Stranded	4		5.1
LS-1005	FTP	26AWG / 24AWG	Stranded	4	AL Foil	6.3
LS-1006	SFTP	26AWG / 24AWG	Stranded	4	AL Foil+Cu braiding	6.6

Cat5e Cable

ITEM NO	CONSTRUCTION	CONDUCTOR		NO. OF PAIRS	SHIELDING	O.D./mm
LS-1007	UTP	24AWG	Solid	2	—	3.0
LS-1008	UTP	24AWG	Solid	4	—	5.1
LS-1009	FTP	24AWG	Solid	4	AL Foil	6.3
LS-1010	SFTP	24AWG	Solid	4	AL Foil+Cu braiding	6.6
LS-1011	UTP	26AWG / 24AWG	Stranded	4	—	5.1
LS-1012	FTP	26AWG / 24AWG	Stranded	4	AL Foil	6.3
LS-1013	SFTP	26AWG / 24AWG	Stranded	4	AL Foil+Cu braiding	6.6

Cat6 Cable

ITEM NO	CONSTRUCTION	CONDUCTOR		NO. OF PAIRS	SHIELDING	O.D./mm
LS-1014	UTP	24AWG	Solid	4	—	6.0
LS-1015	FTP	24AWG	Solid	4	AL Foil	6.3
LS-1016	SFTP	24AWG	Solid	4	AL Foil+Cu braiding	6.6
LS-1017	UTP	26AWG / 24AWG	Stranded	4	—	6.0
LS-1018	FTP	26AWG / 24AWG	Stranded	4	AL Foil	6.3
LS-1019	SFTP	26AWG / 24AWG	Stranded	4	AL Foil+Cu braiding	6.3
LS-1020	SFTP	26AWG / 24AWG	Stranded	4		6.3