


Formation: Tinned or bare, stranded or solid copper wire, two to ten conductors. Color-coded PP or FR-PP insulation, Cores are laid parallel forming a flat cable. Color-coded PVC jacket. Telephone handset cord or line cord.

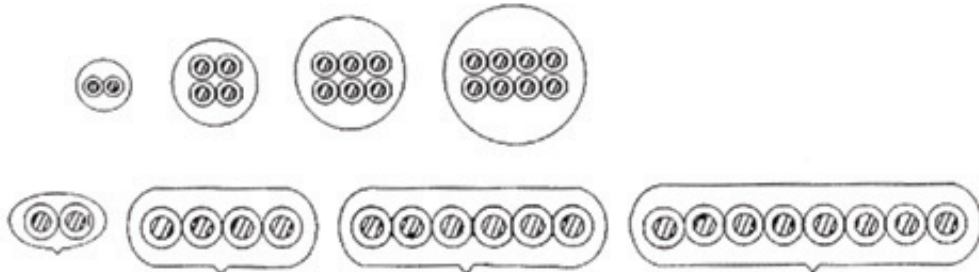

ITEM NO	NO. OF CENTRAL CON. SHIELD DIA. CONDUCTORS(mm)	THICKNESS OF INSULATION(mm)	OUTER DIAMETER
LS-5001	7x0.12x2	1.20	4.00
LS-5002	7x0.12x4	1.25	4.00
LS-5003	7x0.12x6	1.40	5.50
LS-5004	7x0.12x8	1.25	5.90
LS-5005	7x0.12x2	0.90	2.50x5.00
LS-5006	7x0.12x4	1.00	2.50x5.00
LS-5007	7x0.12x6	1.00	2.50x6.80
LS-5008	7x0.12x8	1.00	2.50x9.00
LS-5009	0.5x3	0.90	3.00
LS-5010	0.5x4	0.90	3.50
LS-5011	0.5x5	0.90	4.00
LS-5012	0.5x6	0.90	4.50
LS-5013	0.5x8	0.90	5.20
LS-5014	0.5x10	0.90	5.60
LS-5015	0.5x12	0.90	6.00
LS-5016	0.5x20	0.90	7.50